


1.2 x 1.0 x 0.5 mm SMD Package

FEATURE



- Ultra small size 1.2x1.0x0.5 mm
- High reliability environmental performance
- High frequency stability and high precision
- Designed for automatic mounting and reflow soldering
- RoHS Compliant / Pb Free



ELECTRICAL SPECIFICATIONS

Item	Specifications
Frequency	32.768KHz
Load Capacitance (CL)	6pF, 7pF, 9pF, 12.5pF
Frequency Tolerance(at 25°C)	±20ppm
Operating Temperature Range	-40~+85°C
Turnover Temperature	25 ± 5°C
Frequency Temperature Curve	$(-0.036 \pm 10\%) \times 10^{-6} / ^\circ\text{C}^2$
Equivalent Series Resistance (ESR) max.	90kΩ
Drive Level (Typical)	0.1μW
Drive Level(Max)	0.3μW
Shunt Capacitance(C_0)	1.4pF Typ.
Insulation Resistance	More than 500Mohms at DC100V
Storage Temperature Range	-55°C~+125°C
Aging @25°C 1st Year (Max)	±3ppm/year

DIMENSION(mm)

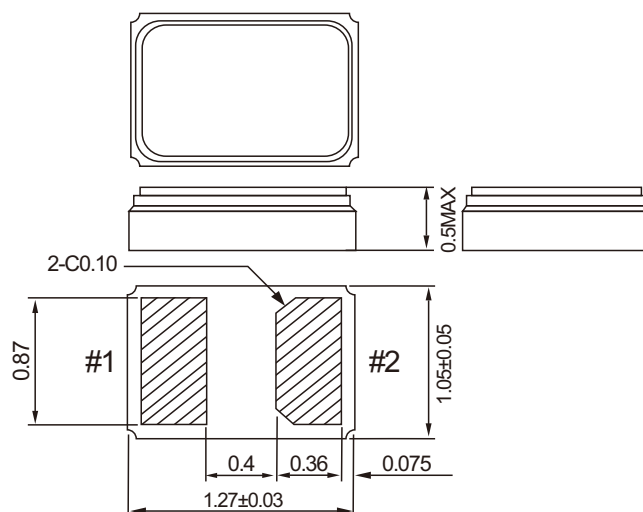

Suggested Layout