


22.1×12.6 mm Resistance Welded SAW Filter

Feature


- Package size 22.1x12.64x5.0mm
- Low-loss SAW component
- Low amplitude ripple
- Sharp rejections at both out-bands
- Usable passband 0.7 MHz
- RoHS compatible



Electrical Specifications

Item		Specifications	Unit
Frequency Range	f_c	50~150MHz	MHz
Band Width		0.5, 2, 4, 10, 18, 24, 30 or specify	MHz
Insertion Loss (min)	IL	3, 5, 7, 8, 12, 20, 25, 28 or specify	dB
Operating Temperature Range		-40~+85	°C
Storage Temperature Range		-55~+125	°C

Dimension(mm)

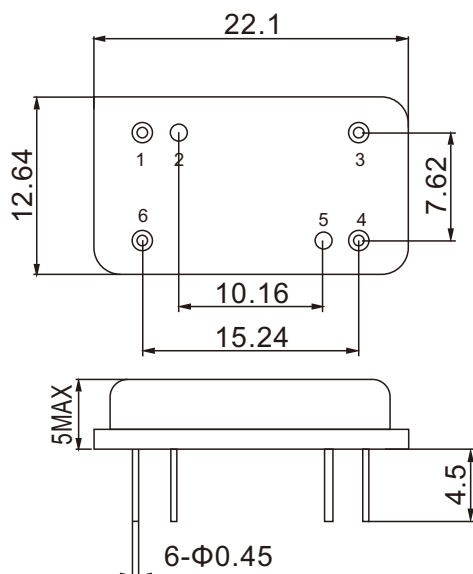

Pin No.	Description
6	Input
4	Output
1, 2, 3, 5	Ground