


13.3×6.5 mm SMD SAW Filter

Feature


- Package size 13.3x6.5x1.8mm
- Low-loss SAW component
- Low amplitude ripple
- Sharp rejections at both out-bands
- Usable passband 0.1 MHz
- RoHS compatible



Electrical Specifications

Item		Specifications	Unit
Frequency Range	f_c	50~150MHz	MHz
Band Width		$\pm 50, \pm 75, \pm 150$ or specify	KHz
Insertion Loss (min)	IL	10, 15, 20 or specify	dB
Operating Temperature Range		-40~+85	°C
Storage Temperature Range		-55~+125	°C

Dimension(mm)

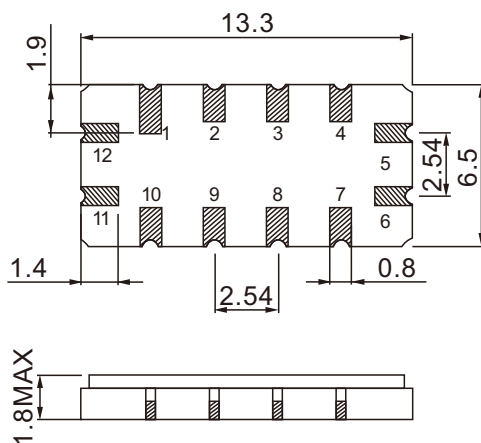

Pin No.	Description
11	Input
5	Output
1,2,3,4,6,7,8,9,10,12	Ground