


7.0 x 5.0 mm SMD Differential Output Voltage Controlled Crystal Oscillator

Feature

- Differential output : LVPECL, LVDS
- Frequency support from 10MHz to 1.5GHz
- Low phase jitter typical:<1ps RMS from 12kHz to 20MHz
- Wide frequency control range
- Pb-free/RoHS compliant




Electrical Specifications


Parameter		LVPECL				LVDS				Unit
		3.3V		2.5V		3.3V		2.5V		
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
Supply Voltage Variation		VDD-10%	VDD+10%	VDD-5%	VDD+5%	VDD-10%	VDD+10%	VDD-5%	VDD+5%	V
Frequency Range		10	1500	10	1500	10	1500	10	1500	MHz
Supply Current	10MHz ≦ FO<160MHz	-	75	-	75	-	50	-	50	mA
	160MHz ≦ FO<1500MHz	-	100		100		75		75	
Duty Cycle		45	55	45	55	45	55	45	55	%
Transition Time : Rise/Fall Time		-	1.0	-	1.0	-	1.0	-	1.0	nSec
Output Level	Out High(Logic“1”)	2.27		2.27			1.6		1.6	V
	Out Low(Logic“0”)		1.7		1.7	0.9		0.9		
Start Time		-	10	-	10	-	10	-	10	mSec
Tri-State (Input to Pin 2)	Enable(High Voltage or floating)	0.7V _{DD}	-	0.7V _{DD}	-	0.7V _{DD}	-	0.7V _{DD}	-	V
	Disable(Low Voltage or GND)	-	0.3 V _{DD}	-	0.3 V _{DD}	-	0.3 V _{DD}	-	0.3 V _{DD}	
RMS Phase Jitter (integrated12KHz to 20MHz)			1		1		1		1	pSec
Control Voltage Function on Pin1										
Control Voltage Center		1.65		1.25		1.65		1.25		V
Control Voltage Range		0.3	3	0.3	3	0.3	3	0.3	3	V
Absolute Pulling Range (APR)		±50		±50		±50		±50		ppm
Linearity			10		10		10		10	%
Modulation Bandwidth		10	-	10	-	10	-	10	-	kHz
VC Input Impedance		1	-	1	-	1	-	1	-	MΩ
Aging(@25 1st year)		-	±3	-	±3	-	±3	-	±3	ppm
Storage Temp. Range		-55	125	-55	125	-55	125	-55	125	°C

Dimension(mm)


TOP VIEW



SIDE VIEW




BOTTOM VIEW



PIN#	Function
1	V _{DD}
2	Tri-State
3	GND
4	Output
5	Comp.Output
6	V _{DD}

Solder Pad Layout(mm)

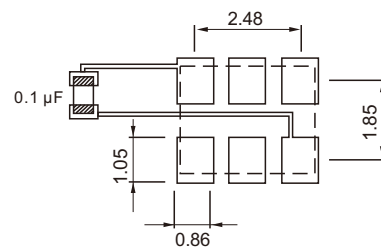

To ensure optimal oscillator performance, place a by-pass capacitor of 0.1 μF as close to the part as possible between V_{DD} and GND pads.

FREQ. STABILITY vs. TEMP. RANGE

Temp. (°C) \ ppm	±25	±50
-10 ~ +60	O	O
-20 ~ +70	Δ	O
-40 ~ +85	Δ	O

O: Available Δ: Conditional X: Not available

Inclusive of calibration @ 25 °C, operating temperature range, input voltage variation, load variation, aging (1 st year), shock, and vibration